



## BCT Hard mount washer advantages

### • Elegant appearance

Derived from European and American design traditions, it boasts an aesthetically pleasing appearance, superior material selection, and meticulous craftsmanship.

### • Stable

Heavy-duty structure design, utilizing imported components from Europe and America for enhanced quality and eliminating maintenance concerns.

### • Durable

The selection of components is designed for enhanced durability, boasting a lifespan of 20 years or 200,000 cycles, thereby extending the profit cycle for our customers.


### • Energy saving

Reduce water usage by 10%. With more advanced motor design and variable frequency drive technology, we achieve a 50% electricity savings every cycle.



## Hard Mount Washer-BCT

Capacity:30/40/60lb

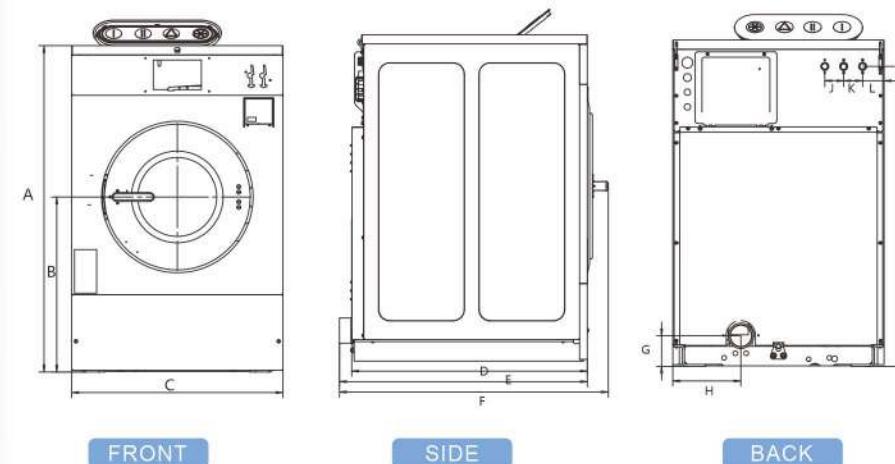

Model Letter	BCT030	BCT040	BCT060
A	1138	1202	1268
B	610	660.5	671
C	737	778	867
D	822	938.2	1022
E	864	988	1057
F	937	1061	1129
G	106	110.4	118
H	237.5	226	252.5
I	1046	1109.8	1175.8
J	66	66	66
K	66	66	66
L	75	75	75

**Blue Whale**

	BCT030	BCT040	BCT060	
Control Option	Touch/Key	Touch/Key	Touch/Key	
Capacity - lb (kg)	30(14)	40(18)	60(27)	
Overall Width - in (mm)	29(737)	30.6(778)	34.1(867)	
*Overall Depth - in (mm)	34(864)	38.9(988)	41.6(1057)	
Overall Height - in (mm)	44.8(1138)	47.3(1202)	49.9(1268)	
Cylinder Diameter - in (mm)	24(610)	26.3(668)	30(762)	
Cylinder Depth - in (mm)	16(406)	20.3(516)	22(559)	
Cylinder Volume - cu. ft (liters)	4.2(119)	6.3(178)	9.0(255)	
Door Opening Size - in (mm)	14.3(363)	16.3(414)	16.3(414)	
Door Bottom to Floor - in (mm)	14(356)	14.6(371)	14.9(378)	
Water Inlet Connection - in (mm)	2x0.75(19)	2x0.75(19)	2x0.75(19)	
Drain Diameter - in (mm)	1x3(76)	1x3(76)	1x3(76)	
Drain Height to Floor - in (mm)	4.3(109)	4.5(114)	4.9(124)	
Motor Power Consumption - HP (kW)	2(1.5)	2(1.5)	3(2.2)	
Cylinder Speeds - RPM (G-Force)	Wash Medium Ultra High	48(0.8) 542(100) 766(200)	46(0.8) 518(100) 733(200)	43(0.8) 485(100) 686(200)
Shipping Dimensions Approx. - in (mm)	Width Depth Height	31.5(800) 38.3(937) 51.3(1303)	32.5(826) 43.5(1105) 53.6(1361)	37.5(953) 46.9(1191) 56.3(1430)
Net Weight - lb (kg)	440(200)	540(245)	680(308)	
Shipping Weight - lb (kg)	480(218)	580(263)	720(327)	
Slat Crate Shipping Weight - lb (kg)	580(263)	680(308)	840(381)	

## BST Stacked washer-extractor/tumble dryers advantages

### • Elegant appearance

Derived from European and American design traditions, it boasts an aesthetically pleasing appearance, superior material selection, and meticulous craftsmanship.

### • Stable

Heavy-duty structure design, utilizing imported components from Europe and America for enhanced quality and eliminating maintenance concerns.



### • Durable

The selection of components is designed for enhanced durability, boasting a lifespan of 20 years or 200,000 cycles, thereby extending the profit cycle for our customers.

### • Energy saving


Reduce water usage by 10%. With more advanced motor design and variable frequency drive technology, we achieve a 50% electricity savings every cycle.

### • More energy-efficient

Axial airflow guidance technology, 3D hot air surround, ensuring full contact of hot air with clothing. With a bidirectional frequency conversion structure, it offers both forward and reverse rotations, ensuring clothes don't get tangled, and drying is significantly faster.

## Stacked washer-extractor/tumble dryers-BST

Capacity:30/50lb

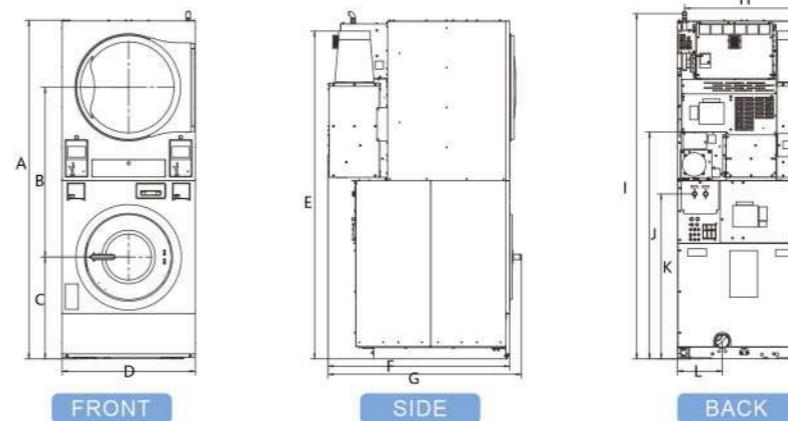

Model Letter	BST30	BST50
A	2027	2141
B	1015	1042.5
C	610	660.5
D	797	875
E	1962	2049.8
F	1086	1234
G	1157	1298.6
H	755	770
I	2067	2154.5
J	1359	1406.7
K	987	1040
L	267.5	273.5

## Blue Whale

	BST30 Washer-Extractor	Tumble Dryer	BST50 Washer-Extractor	Tumble Dryer
Control Option	Touch/Key		Touch/Key	
Capacity - lb (kg)	30(14)X2		50(23)X2	
Overall Width - in (mm)	31.4(797)		34.4(875)	
Overall Depth - in (mm)	45.5(1157)		51.1(1299)	
Overall Height - in (mm)	79.8(2027)		84.3(2141)	
Cylinder Diameter - in (mm)	24.0(610)	30.0(762)	26.3(668)	33.0(838)
Cylinder Depth - in (mm)	16.0(406)	26.0(660)	20.3(515)	30.0(762)
Cylinder Volume - cu. ft (liters)	4.2(119)	10.6(300)	6.3(178)	14.8(419)
Reversing Cylinder	-	Standard	-	Standard
Door Opening Size - in (mm)	14.3(363)	22.6(574)	16.3(414)	26.9(683)
Door Bottom to Floor - in (mm)	14.0(356)	51.3(1303)	14.6(370)	52.3(1328)
Water Inlet Connection - in (mm)	2x0.75(19)	-	2x0.75(19)	-
Drain Diameter - in (mm)	1x3(76)	-	1x3(76)	-
Drain Height to Floor - in (mm)	4.3(108)	-	4.5(115)	-
Heat Input Power - Btu/hr (kW)	Full type Save type	73,000(21.4) 30,712(9)	-	95,000(27.8)
Gas Connection - in	-	1/2 NPT	-	1/2 NPT
Air Outlet - in (mm)	-	8.0(200) Elliptical	-	10.0(250) Elliptical
Airflow - cfm (l/sec)	-	400(190)	-	600(285)
Motor - HP (kW)	Fan Drive	2(1.5) 0.5(0.4) 0.3(0.2)	2(1.5)	0.5(0.4) 0.5(0.4)
Cylinder Speeds - RPM (G-Force)	Wash Medium Ultra High	48(0.8) 542(100) 766(200)	-	46(0.8) 518(100) 733(200)
Shipping Dimensions Approx. - in (mm)	Width Depth Height	34.5(876) 47.0(1194) 83.0(2108)		35.5(902) 54.0(1372) 89.0(2261)
Net Weight - lb (kg)		770(349)		910(413)
Shipping Weight - lb (kg)		787(357)		930(422)



## BT Single tumble dryer advantages

### • Elegant appearance

Derived from European and American design traditions, it boasts an aesthetically pleasing appearance, superior material selection, and meticulous craftsmanship.

### • Stable

Heavy-duty structure design, utilizing imported components from Europe and America for enhanced quality and eliminating maintenance concerns.



### • Durable

The selection of components is designed for enhanced durability, boasting a lifespan of 20 years or 200,000 cycles, thereby extending the profit cycle for our customers.

### • Safety

Enhanced safety features to ensure customers avoid accidents while using. More precise temperature control ensures that clothes do not break during the drying process.

### • More energy-efficient

Axial airflow guidance technology, 3D hot air surround, ensuring full contact of hot air with clothing. With a bidirectional frequency conversion structure, it offers both forward and reverse rotations, ensuring clothes don't get tangled, and drying is significantly faster.


### • Convenience

Super large filter structure reduces the number of times the dryer cleans, and a more encrypted filter design makes cleaning more convenient for customers.


### • More heating options

## Single Tumble Dryer-BT


Capacity:35/55lb

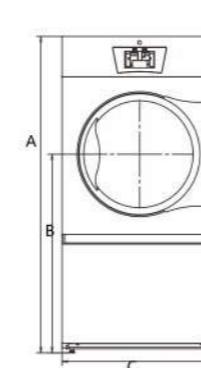

FRONT

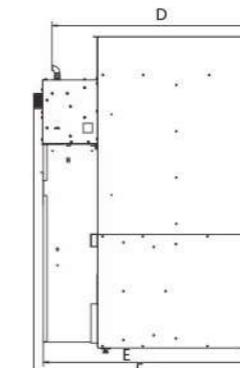

SIDE



BACK

Model Letter	BT035	BT055
A	1625	1700
B	1020	1037.5
C	800	875
D	1063.2	1240.4
E	1108.2	1233.4
F	1157.2	1346.4
G	1192.6	1378.8
H	1462.2	1415.6
I	299.2	303.2
J	846.5	880
K	150.5	148.7
L	121	120.2

**Blue Whale**

	BT035	BT055
Control Option	Touch/Key	Touch/Key
Capacity - lb (kg)	35(16)	55(24)
Overall Width - in (mm)	31.5(800)	34.5(875)
Overall Depth - in (mm)	45.5(1157)	53.0(1346)
Overall Height - in (mm)	64.0(1625)	66.9(1700)
Cylinder Diameter - in (mm)	30(762)	33(838)
Cylinder Depth - in (mm)	30(762)	35.0(889)
Cylinder Volume - cu. ft (liters)	12.3(350)	17.3(490)
Reversing Cylinder	Standard	Standard
Door Opening Size - in (mm)	22.7(576)	26.9(683)
Heat Input Power - Btu/hr(kw)	Full type Save type	90,000(24) 61,424(18)
Gas Connections* - in (npt)	0.5	0.5
Air Outlet - in (mm)	8(200)	8(200)
Motor - HP (kw)	Fan Cylinder	0.5(0.4) 0.3(0.2)
Airflow - cfm	600(280)	700(330)
Shipping Dimensions Approx. - in (mm)	Width Depth Height	33(840) 49(1240) 67.6(1720)
Net Weight - lb (kg)	340(155)	438(199)
Shipping Weight - lb (kg)	360(165)	478(212)



## BTT Tumble dryer advantages

### • Elegant appearance

Derived from European and American design traditions, it boasts an aesthetically pleasing appearance, superior material selection, and meticulous craftsmanship.

### • Stable

Heavy-duty structure design, utilizing imported components from Europe and America for enhanced quality and eliminating maintenance concerns.



### • Durable

The selection of components is designed for enhanced durability, boasting a lifespan of 20 years or 200,000 cycles, thereby extending the profit cycle for our customers.

### • Safety

Enhanced safety features to ensure customers avoid accidents while using. More precise temperature control ensures that clothes do not break during the drying process.

### • More energy-efficient

Axial airflow guidance technology, 3D hot air surround, ensuring full contact of hot air with clothing.

With a bidirectional frequency conversion structure, it offers both forward and reverse rotations, ensuring clothes don't get tangled, and drying is significantly faster.


### • Convenience

Super large filter structure reduces the number of times the dryer cleans, and a more encrypted filter design makes cleaning more convenient for customers.

### • More heating options

## Tumble Dryer-BTT

Capacity:30/50lb

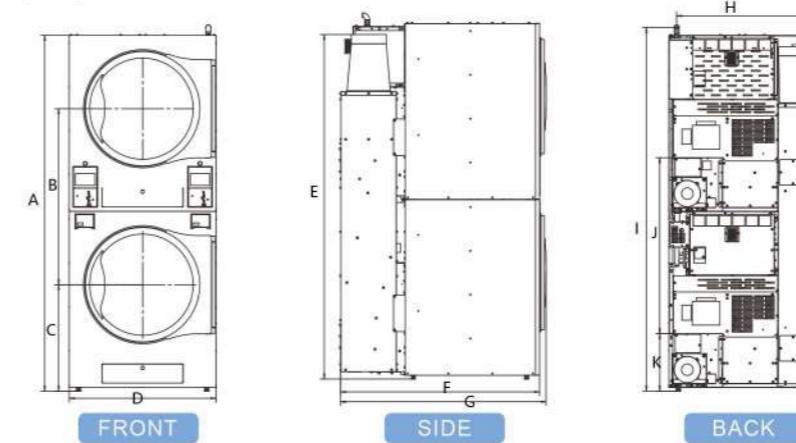

Model Letter	BTT30	BTT50
A	1932	2061
B	956	1020
C	578	603
D	800	875
E	1870.8	1980.8
F	1081	1234
G	1116	1266.4
H	755.2	770.3
I	1975.6	2074.5
J	956	1020
K	311.7	306.7

## Blue Whale

	BTT30	BTT50
Control Option	Touch/Key	Touch/Key
Capacity - lb (kg)	30(13)X2	50(23)x2
Overall Width - in (mm)	31.5(800)	34.4(875)
Overall Depth - in (mm)	43.9(1116)	49.8(1266)
Overall Height - in (mm)	76.0(1932)	81.1(2061)
Cylinder Diameter - in (mm)	30.0(762)	33.0(838)
Cylinder Depth - in (mm)	26.0(660)	30.0(762)
Cylinder Volume - cu. ft (liters)	10.6(300)	14.8(420)
Reversing Cylinder	Standard	Standard
Door Opening Size - in (mm)	22.6(574)	26.9(683)
Heat Input Power - Btu/hr(kw)	Full type Save type	73,000x2(21.4) 40,949x2(12)
Gas Connections* - in (npt)	0.5	0.5
Air Outlet - in (mm)	Standard ProCapture	1X8(200)oval -
Motor - HP (kw)	Fan Cylinder	2X0.5(0.4) 2X0.5(0.4)
Airflow - cfm	2X400(380)	2x600(285)
Shipping Dimensions Approx. - in (mm)	Width Depth Height	32.5(830) 47.0(1190) 79.9(2030)
Net Weight - lb (kg)	Standard ProCapture	580(265) -
Shipping Weight - lb (kg)	Standard ProCapture	615(280) -